

TE-3000S

A Better Way of Viewing Your Operation

Casio's New Color LCD

Powerful and flexible solutions from CASIO

for today's demanding business.

TE-3000 *Electronic Cash Register*

with a New Multi-Line

Color LCD Display



CASIO[®]
the unexpected **extra**[™]

TE-3000S Cash Register

A Better Way of Viewing Your Operation

Main features and functions

Operator Display

5.2 inch wide color LCD screen with 2 lines X 16 characters and a 1 line numeric display offer the operator a clear view of transaction information.

Use 5 selectable colors for the LCD backlight to illuminate the operator display to fit the customer's environment. A scheduler function makes it possible to switch the backlight color, price levels and automate your report printing at different times of the day or week.

Tilt mechanism for optimum viewing

Receipt/Journal Printer

A 2-station fast (14 lines per sec.), silent and wide (58mm) printer offers the option of using the built-in auto cutter or tear bar to generate customer receipt. The TE-3000 printer also offers:

- Drop-in paper loading for easy handling of paper replacement
- Graphic and Watermark logo printing for professional presentation of customer receipts

Communications

The TE-3000's 3 serial ports allow various peripheral connections which include:

- Scanner
- External dot matrix and/or thermal printer
- Slip printer
- Remote customer display
- Scale
- PC/modem
- Credit/Debit/EBT interface

An optional Arcnet board (IO PB-17) provide register-to-register communications for sales consolidation and program uploading/downloading. Up to 32 terminals can be connected via CAT5 or the Casio inline network.

Storage Device



The TE-3000's innovated use of CF card (Compact Flash Card) technology gives the ability to save and restore program information.

Functionality

- Scan up to 25,000 items
- Mix & Match discounting
- Not Found Item file
- 30 departments (expandable to 99)
- 512K RAM – standard (expandable to 1.5MB)
- Clerk Detail Tracking (Up to 200 totalizers)
- Sub-department/Group Linking
- Food Stamps
- 3 price levels
- PLU stock control
- Up to 4 cash drawers
- Suspend/resume
- Bottle link
- Clerk commission rates
- Daily/Weekly/Monthly reporting
- Time & Attendance
- 99 Clerks

Options

- RK-3 memory board for 1MB
- Multi-Drawers kit (MDL-11) 3 Additional Drawers
- I/O-PB-17 (IRC board)
- Dallas Clerk Key Kit

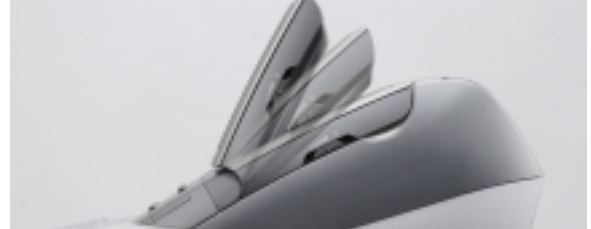

• The LCD display can be tilted to the optimal reading angle.



• Drop-in paper-loading for quick, easy paper roll changes



• CF card interface for fast, simple data transfer

Specifications

Electrical Specifications

Power consumption	In operation stand-by	120V	220V	23V	240V
		Max. 0.9A	0.5A	0.5A	0.5A
Memory protection	Back-up battery	VL3032/1F2 (Vanadium lithium battery)			
	Back-up period	90 days (25 °C)			
	Battery life	Replace the battery every 5 years.			
	Recharge time	48 hours (full charge)			

Main components

Flash Rom	Capacity	2Mbytes
Thermal printer	Printer method	Impression heat line dot
	Head specification	Total dot number: 432 dots/dot line Dot pitch: Length 8 dots/mm Wide 8 dots/mm
	Paper cut	Auto-paper cut
Roll paper	Paper supply method	Drop-in paper loading
	Type	Heat-sensitive paper
	Size	57.5±0.5mm
	Roll diam	φ83 or less
	Thickness	75±3µm

CASIO, Inc., System Products Division

570 Mt. Pleasant Ave., Dover, NJ 07801

(800) 548-0212 or (973) 361-5400 Fax: (973) 537-8956

Website: www.casio.com or casio4business.com Email: spd@casio.com

CASIO

the unexpected extra™